

# LP3 LED PAD

## R65 3-LED LIGHT HEAD (Surface Mount)



### FEATURES

- ECE R65 Class 1 (XA1, XB1, XR1) certified with 0.26" (6.6mm) super low-profile optic.
- Self-Adhesive backing for quick simple mounting.
- Multi-Voltage Input 12~24VDC.
- Built-in 19 selectable flash patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for external or internal use.

### SPECIFICATIONS

**Compliance:** ECE R65 Class 1 (XA1, XB1, XR1), ECE R10, IP68

**LED Element:** High-power LED x 3pcs

**No. of Warning Patterns:** 19

**Operating Voltage:** 12~24VDC

**Avg. Current:** 0.35A @12VDC / 0.2A @24VDC  
(varies with flash pattern)

**Max. Current:** 0.7A @12VDC / 0.4A @24VDC

**Avg. Power:** 4.2W @12VDC / 4.8W @24VDC  
(varies with flash pattern)

**Max. Power:** 8.4W @12VDC / 9.5W @24VDC

**Wires:** WhiteVcc : 20cm (24AWG)  
Black-GND : 20cm (24AWG)  
Brown-Flash Patterns & Sync : 20cm (24AWG)

**Fuse Rating:** 1A

**Synchronization:** 15 units


**Storage Temp. (°C):** -40° ~ +75°

**Working Temp. (°C):** -30° ~ +65°

**LED Colour:** AMBER

**Lens Colour:** Clear

### DIMENSIONS

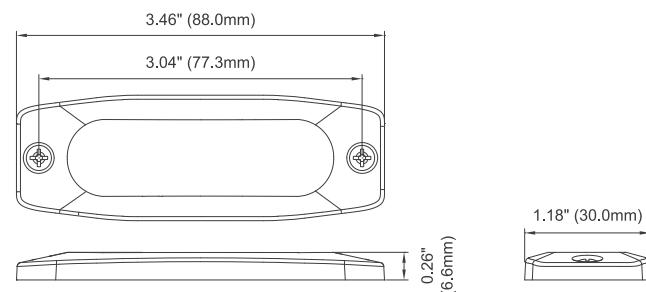

### FLASH PATTERN

Flash Patterns					
1	Double	[R65]	11	Quint	[SAE]
2	Single	[2HZ]	12	Mega	
3	Triple	[2HZ]	13	Giga	
4	Quad	[2HZ]	14	Ultra	[SAE]
5	Random		15	Single-Quad	
6	Steady EF		16	Single H/L	
7	Single	[SAE/CA13]	17	Single-Triple-Quint	
8	Double	[SAE]	18	Steady Scene	
9	Triple	[SAE]	19	Cruise	
10	Quad	[SAE]			

### PART No.

M043-0033A-000 (ECE R65, Amber)

1603-300756