




VECTOR SIX

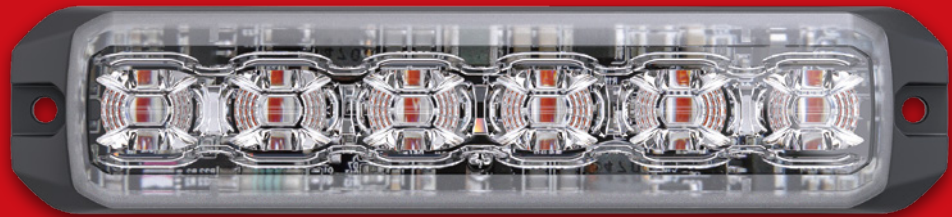


OPTIBEAM VECTOR SIX

Amber: 1603-300761

FEATURES

- Powerful output that meets ECE R65 Class 2 in single unit and ICAO standards when mounted correctly in set of four units.
- Military grade, exceptionally high-level resistance to electromagnetic interference: MIL-STD-461 (RE102, CE102, RS103) & CISPR 25 Class 5.
- Multi-memories operation, allow quick change of different pattern or colour for varies application.
- Reverse polarity protection.
- Multi-unit synchronization in simultaneous or alternating flash.
- Weatherproof and vibration resistant design for external or internal use.

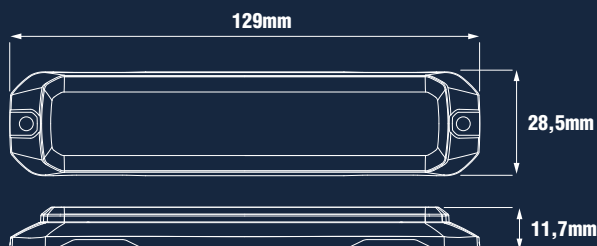

SPECIFICATIONS

Voltage	12VDC
Avg. Current	0,70A @ 12VDC
Max. Current	1,4A @ 12VDC
Avg. Power	8,4W @ 12VDC
Max. Power	16,8W @ 12VDC
IP Rating	IP67
LED	High power LED x 6 pcs
LED Color	Amber
Dimensions	129 x 28,5 x 11,7 mm
Wires	25 cm Black: GND (20AWG) Red: Warning Mode 1 (20AWG) White: Warning Mode 2: (20AWG) Green: Low Power (20AWG) Yellow: Flash Pattern & Sync (20AWG)
Compliance	SAE J595 Class 1, SAE J845 Class 1, ECE R65 Cat. X Class 2 (Amber, Blue), MIL-STD-461G (RE102, CE102, RS103), ECE R10, CISPR 25 Class 5, IP67
Fuse	2A
Synchronization	Up to 20 units
Lens Color	Clear
Storage Temp.:	-40°C to +70°C
Working Temp.:	-40°C to +65°C



CLASS 2



CLASS 1



CLASS 1

OPTIBEAMLIGHTS.COM

STARTAX

Sales: Stores specialized in car spare parts across the country
Importer: Startax Finland Oy | www.startax.net