

S-PAL06

SPLIT Color PAL06



FEATURES

- Split color capability with independent activation wires.
- Pop-In Design for easier installation.
- Built-in 19 Selectable Flash Patterns.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multiple units are synchronizable, and can flash simultaneously or alternately.
- Reverse polarity protection.
- Weatherproof and vibration resistant for external or internal use.
- Flange option for surface mount applications.

SPECIFICATIONS

LED Element: High intensity LED x 6pcs per head.

Warning Patterns: 19 Flash Patterns

Operates Voltage: 10-16 VDC

Ave. Current: 0.65A @12VDC (varies with flash pattern)

Ave. Power: 7.8 Watts (varies with flash pattern)

Max. Current: 1.3A @12VDC

Max. Power: 15.6 Watts

Function Wires: Red-Vcc: 185cm / 20AWG

Black-GND: 185cm / 20AWG

Yellow-Flash Patterns & Sync: 185cm / 20AWG

White-Vcc: 185cm / 20AWG

Connection Cable: Output : 85cm / 22AWG

Extention : 200cm / 22AWG

Lighthouse : 20cm / 22AWG

Fuse Recommend: 2A



Multi-Unit Synchronization: Over 15 units

Max. Cable Length: Controller Cable = 600cm


Lighthouse Cable = 800cm

DIMENSIONS

Lighthouse

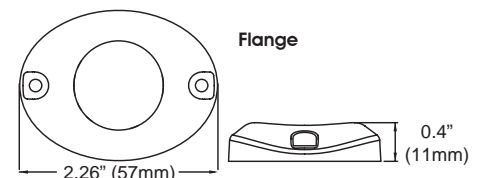

Flasher



PART NO.

- **1603-300543** (Head1 = amber/blue...Head2 = amber/blue)

FLASH PATTERN

FP#	Flash Patterns		
1	Random (default)	11	Double (all)
2	Single (split)	12	Quad (all)
3	Double (split)	13	Quint (all)
4	Quad (split)	14	Mega (all)
5	Quint (split)	15	Ultra (all)
6	Mega (split)	16	Single-Quad (all)
7	Ultra (split)	17	Single H/L (all)
8	Single-Quad (split)	18	Steady Half
9	Single H/L (split)	19	Steady All
10	Single (all)		

STARTAX

Maahantuaja:
Startax Finland Oy